

Sunmodule® *SW 100 poly RGP*



Produced in Germany,
the center for solar technology



TUV Power controlled:
Lowest measuring tolerance in industry



25 year linear performance warranty and
10 year product warranty



SolarWorld AG relies on Germany as its technology location, thereby ensuring sustainable product quality.

The TÜV Rheinland Power controlled inspection mark guarantees that the nominal power indicated for solar modules is inspected at regular intervals and thus ensured. The deviation to TÜV is maximum 2 percent.

With its linear performance warranty covering a period of 25 years, SolarWorld guarantees a maximum performance depression of 0.7% p.a., a significant added value compared to the two-phase warranties common in the industry. Therefore, the service certificate offers comprehensive protection for your investment in the long term.



Sunmodule® SW 100 poly RGP

PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC)*

		SW 100
Maximum power	P_{max}	100 Wp
Open circuit voltage	U_{oc}	44.2 V
Maximum power point voltage	U_{mpp}	37.6 V
Short circuit current	I_{sc}	3.02 A
Maximum power point current	I_{mpp}	2.75 A


Measuring tolerance (P_{max}) traceable to TUV Rheinland: +/- 2% (TUV Power controlled)

*STC: 1000W/m², 25°C, AM 1.5

PERFORMANCE AT 800 W/m², NOCT, AM 1.5

		SW 100
Maximum power	P_{max}	72.7 Wp
Open circuit voltage	U_{oc}	38.9 V
Maximum power point voltage	U_{mpp}	33.1 V
Short circuit current	I_{sc}	2.46 A
Maximum power point current	I_{mpp}	2.20 A

Minor reduction in efficiency under partial load conditions at 25°C: at 200 W/m², 100% (+/-2%) of the STC efficiency (1000 W/m²) is achieved.

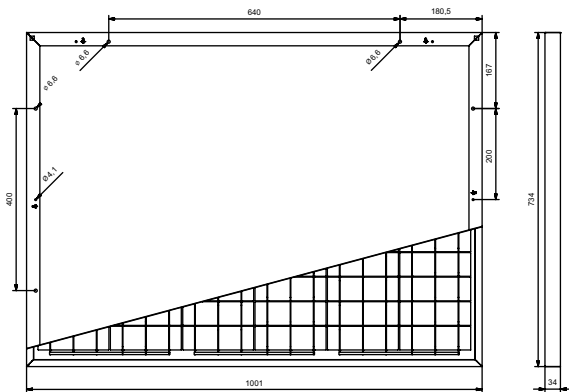

DIMENSIONS

Length	734 mm
Width	1001 mm
Height	34 mm
Frame	Clear anodized aluminum
Weight	8.0 kg

COMPONENT MATERIALS

Cells per module	72
Cell type	Poly crystalline
Cell dimensions	52 mm x 156 mm
Front	tempered glass (EN 12150)

THERMAL CHARACTERISTICS


NOCT	46 °C
TC I_{sc}	0.051 %/K
TC U_{oc}	-0.31 %/K
TC P_{mpp}	-0.41 %/K

ADDITIONAL DATA

Power sorting	+/- 5%
---------------	--------

PARAMETERS FOR OPTIMAL SYSTEM INTEGRATION

Maximum system voltage SC II	1000 V
Maximum reverse current	15 A
Load / dynamic load	5.4 / 2.4 kN/m ²
Number of bypass diodes	3
Operating range	-40 °C to +85 °C

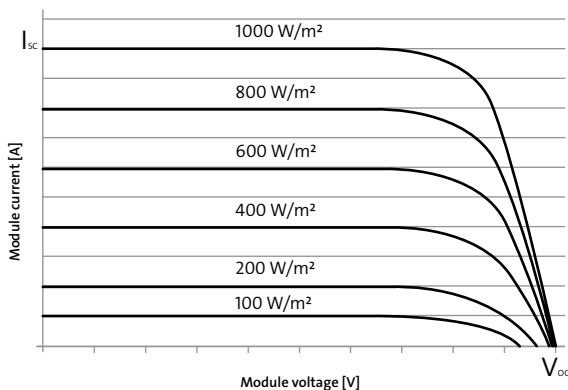

- Qualified, IEC 61215
- Safety tested, IEC 61730
- Periodic Inspection
- Blowing sand resistant

